

# FPK SERIES

## STATIC PULVERIZERS

for excavators from 15 to 60 ton


# First quality secondary demolition

Designed and built to achieve high crushing force.

Cylinder fully protected from possible debris during demolition.

Speed valve \*optional.

Easy replaceable wearing parts.

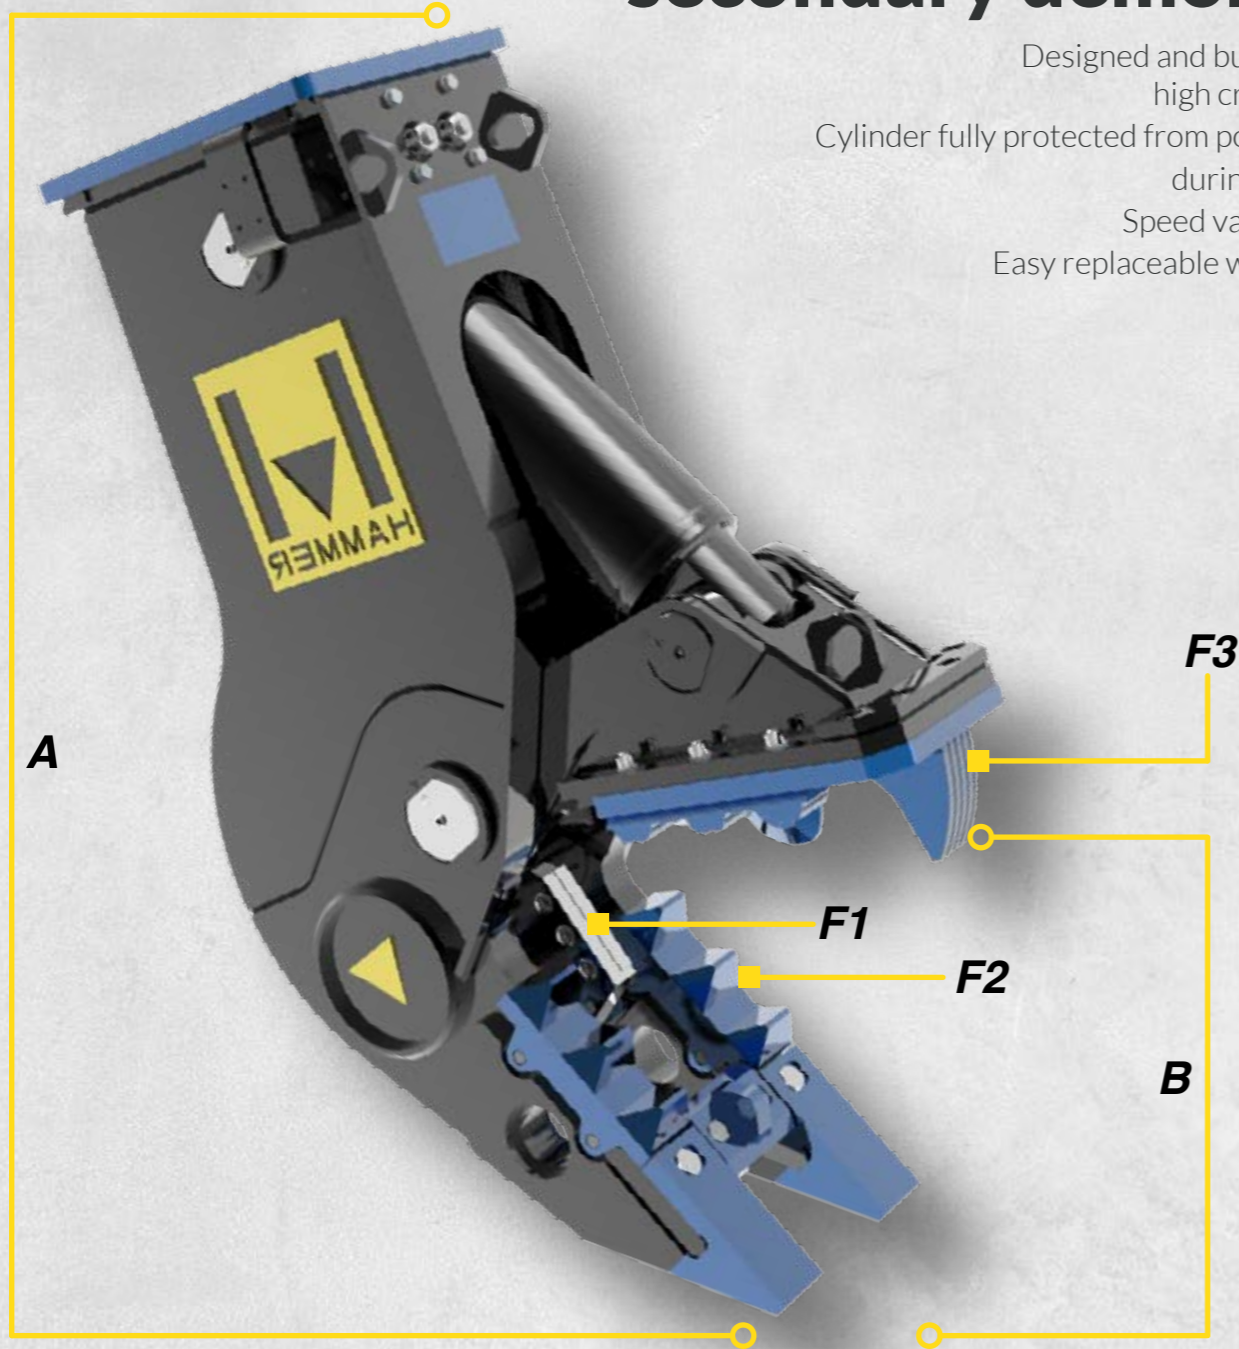

Mining & Quarring




Demolition & Renovation



Metallurgic Industry



Construction



Recycling

Models		FPK16	FPK21	FPK32	FPK42
Carrier weight	t	15-25	20-35	27-45	35-60
Weight	kg	1600	2000	3000	4000
Excavator oil flow capacity	l/min	140-200	200-250	220-280	260-340
Excavator working pressure	bar	350	350	350	350
A	mm	2090	2230	2450	2750
B	mm	745	840	980	1200
Steel blade length	mm	200	200	300	300
F1	t	240	285	355	415
F2	t	100	125	155	200
F3	t	70	80	95	110
Ø Max	mm	35	45	55	70



ALL THE PARTS THAT MOSTLY UNDERGO WEARING ARE EASILY REPLACEABLE

**\*OPTIONAL SPEED VALVE**



DESIGNED FOR SECONDARY DEMOLITION, HAMMER STATIC PULVERIZERS CAN BOTH BREAK UP REINFORCED CONCRETE STRUCTURES AND SEPARATE THE STEEL.

