SB-SQ SERIES

HYDRAULIC BREAKERS WITHOUT TIE RODS

for excavators from **0.5** to **13 ton**

Break in a smart way!

More power / less vibrations and maintenance.
Long lasting nitrogen charge.
Protected tubes.
Silenced body.
Monobloc body without tie rods.
Double retainer pin.
Only two moving parts.
For all types of installations.
Visibility and versatility.

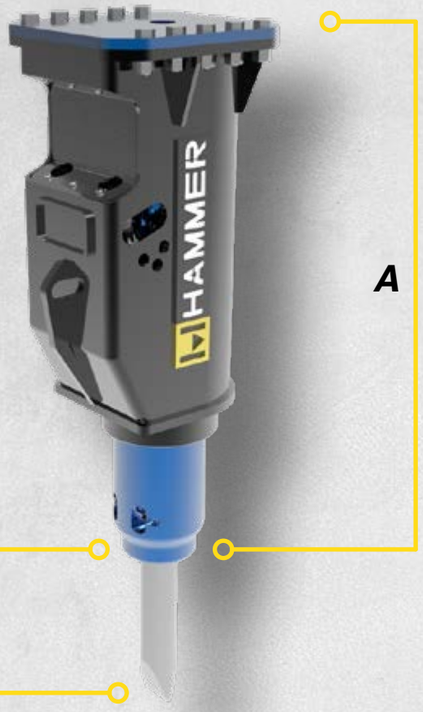

Mining & Quarring

Demolition & Renovation

Metallurgic Industry

Construction

Recycling

BLUNT TOOL
Suitable for reinforced concrete and very compact rocks.

PYRAMID TOOL
Suitable for reinforced concrete and very compact rocks.

CHISEL TOOL
Suitable for medium-hard and layered rocks.

MOIL POINT
Suitable for concrete, medium-hard and not layered rocks.

PILE DRIVER
Suitable for planting wooden or concrete poles.

WOOD CUTTER TOOL
Suitable for cutting all types of wood.

ASPHALT CUTTER
Suitable for cutting asphalt.

Models		SB55	SB70	SB100	SB150	SB200	SB250	SB300	SQ380	SQ520
Carrier weight	*t*	0.5-1.4	0.5-1.6	1.2-2.5	1.5-3.8	2.5-5	3-6.5	4.5-8.5	5-10	7-13
Weight	*kg*	60	70	100	135	190	240	280	350	500
Body height (A)	*mm*	583	583	666	666	869	869	904	1000	1150
Tool height (B)	*mm*	200	228	255	255	275	300	295	385	430
Tool diameter	*mm*	40	40	45	48	55	65	74	77	85
Required oil supply	*l/min*	15-20	18-23	20-30	22-40	25-55	30-60	50-70	50-80	65-90
Oil hammer pressure	*bar*	110	110	110	110	130	140	160	160	170
Blows per minute	*/min*	800-1700	800-1750	800-2300	800-2000	900-1900	850-1800	600-1500	500-1150	400-1000
Energy per blow	*j*	250	280	400	580	750	950	1200	1600	2400
Max. Back pressure	*bar*	30	30	30	30	30	30	30	30	30
Inner diam. in hose	*inch*	1/2”	1/2"	1/2”	1/2”	1/2"	1/2"	3/4”	3/4”	3/4”
Inner diam. out hose	*inch*	1/2”	1/2"	1/2”	1/2”	1/2"	1/2"	3/4”	3/4”	3/4”

All illustrations and numerical data in this catalog are purely indicative and subject to change at our discretion and without notice. We therefore reserve the right to modify them with a view to improving and continuously developing our product.

SEE MORE